


LEAD FINISH: SILVER	
BUSHING FINISH: SILVER	
CAPACITANCE	3000pF MIN.
TEMP. RANGE	-55°C TO 125°C
CURRENT	10 AMP MAX.
WORKING VOLTAGE -55°C TO 125°C	115VAC @ 400Hz 500VDC MAX.
D.C. RESISTANCE	.01ohms MAX.
MIN. I.L. PER MIL-STD-220 AT 25°C NO LOAD	
FREQ. MHz	I.L. (db)
10	12
30	20
100	45
300	60
500	--
1GHz	60
10GHz	60

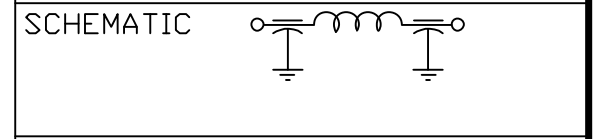

MARKING:

PART: SF011 (FAIRVIEW)  
 SF011M (MEXICO)

BAG:  
 51F-719-011  
 DATE CODE  
 QTY./BAG (100 MAX.)

						01	00	REV. NO.	TOLERANCES UNLESS OTHERWISE SPECIFIED
						CN 27111-CPD	CN 19425-CPD	CHANGE NOTICE	Fractions ± 1/64
									Dec. .xx±
									Dec. .xxx±.010
									Angles ±0° 30'
								CODE IDENT. NO.	DLSP2

<p>FAIRVIEW PENNSYLVANIA</p> <p>SPECTRUM CONTROL INC.</p>		Dwn. KNOWLTON	Description Pi
		Date 05/22/06	RESIN SEAL FILTER
Engr. STRUCHEN	51F-719-011		
Scale NONE			

