


Film, Metallized Polypropylene, Power, C4AT, 30 uF, 5%, 250 V, 70C, Lead Spacing = 37.5mm

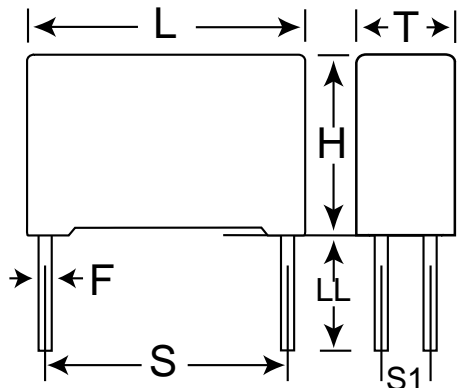

**Dimensions**

L	42.5mm NOM
H	45mm NOM
T	30mm NOM
S	37.5mm +/-0.4mm
S1	20.3mm +/-0.4mm
LL	6mm -2mm

**Packaging Specifications**

Packaging:	Bulk
Packaging Quantity:	36

**General Information**

Dielectric:	Metallized Polypropylene
Style:	Radial
Series:	C4AT
Features:	Switching
RoHS:	Yes
Lead:	4 Wire Leads

**Specifications**

Capacitance:	30 uF
Capacitance Tolerance:	5%
Voltage DC:	250 VDC
Voltage AC:	160 VAC
Temperature Range:	-40/+85C
Rated Temperature:	70C
Dissipation Factor:	0.05%
Max dVdt:	20 V
Resistance:	2.6 mOhms (100kHz)
Current:	22 Amps (100kHz 70C), 600 Amps (Peak)